



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Bescheinigung

Certificate

Attestation

REC'D 25 MAY 2004

WIPO PCT

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03075882.5

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:
Application no.: 03075882.5
Demande no:

Anmeldetag:
Date of filing: 25.03.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

SHELL INTERNATIONALE RESEARCH
MAATSCHAPPIJ B.V.
Carel van Bylandtlaan 30
2596 HR Den Haag
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titren'est indiqué se referer à la description.)

Sluice vessel and method of operating such a sluice vessel

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

C10J3/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT SE SI SK TR LI

25. 03. 2003

TS 1311 EPC

Sno

(91)

SLUICE VESSEL AND METHOD OF operating SUCH A SLUICE
VESSEL

The present invention relates to a sluice vessel for feeding solid particulates into a pressurized pressure vessel.

Such a sluice vessel may be used in a gasification plant, wherein a pulverised carbonaceous fuel, such as coal, is transformed into synthesis gas.

Such a gasification plant can comprise an atmospheric powder coal storage vessel, a sluice vessel, a pressurized powder coal storage vessel, and a gasification reactor. In operation, the powder coal is charged from the powder coal storage vessel into the sluice vessel at atmospheric pressure. Then the sluice vessel is closed and pressurised.

After the pressure the sluice vessel is essentially equal to or somewhat higher than that in the pressurized powder coal storage vessel, the load of powder coal is charged into the pressurized powder coal storage vessel. Hence, the pressurized powder coal storage vessel is supplied with powder coal load by load in a batch wise manner.

To facilitate a continuous flow of powder coal from the pressurized powder coal storage vessel to the gasification reactor, the pressure in the pressurized powder coal storage vessel is desirably higher than the operating pressure inside the gasification reactor. Thus, a continuous supply of powder coal from the pressurized powder coal storage vessel to the gasification reactor is feasible, provided that the batch loading of the pressurized powder coal storage vessel occurs at

sufficiently high repetition rate to replenish the supply of powder coal in the pressurized powder coal storage vessel before it is empty. In the above described configuration, the powder coal storage vessel thus acts as an accumulator to receive and store the batches that are released by the sluice vessel, and continuously release its content.

In practice, the operating pressure in the gasification reactor is as high as tens of bars. Consequently, the sluice vessel must normally be cycled between atmospheric pressure and tens of bars.

A problem recognised in US patent 4,067,623 with typical sluice vessels for pressurising fine particulate materials is that the fine material undergoes marked compaction during pressurisation of the sluice vessel, often resulting in a tendency of the fine material to form bridges. In the mentioned US patent, it is proposed to solve this problem by provision of an aerating cone in the sluice vessel provided with a number of nozzles, uniformly distributed over the length and periphery of its casing. When the fine material has been heavily compacted after pressurisation of the sluice, and is to be moved from the sluice vessel to the storage vessel, the nozzles in the aerating cone are pressurised with gas which can pass through said nozzles deeply into the fine material and hence cause effective loosening of the material by breaking up the compacted mass, so that bridge-formation can be prevented.

This solution has various drawbacks. It has been found that the compacted material does not in all cases effectively break up, thus still causing bridge-formation during discharging.

Another drawback is that the breaking of the compacted material is time consuming.

It is still another drawback that, in particular where the particulate material tends to form bridges very readily, the aeration gas must be provided in a pulsating manner.

5 It is thus an object of the invention to more effectively reduce the risk of clogging up of the discharge port of the sluice vessel.

10 According to the invention, this object is achieved in a sluice vessel with a low pressure state and a high pressure state, the sluice vessel comprising means for charging the sluice vessel with a load of the solid particulates when the sluice vessel is in its low pressure state, at least one discharge port, and
15 pressurising means for increasing the pressure inside the vessel by bringing a pressurising fluid into the vessel, to bring the vessel into its high pressure state before discharging the load via the discharge port, whereby the pressurising means comprises one or more pressurising fluid inlet means arranged to be submerged under the load
20 of solid particulates.

By introducing at least part of the pressurising fluid in the sluice vessel through the load of solid particulates, the load of solid particulates is aerated during the pressurisation of the sluice vessel. Thereby
25 the occurrence of compaction of the load can be avoided from the onset, so that it is no longer required to break the compacted load after pressurisation. The risk of clogging up the discharge port is thereby effectively reduced, even for materials that have a particular
30 tendency to compact, such as is the case when smaller and larger particulates are present together such as is often the case with powder coal.

In an embodiment of the invention, the pressurising fluid inlet means comprises a supply passage for
35 transporting the pressurising fluid, the supply passage

being connectable to a pressurisation device. The supply passage allows for transporting the pressurising fluid to an advantageous location underneath the load of solid particulates.

5 The supply passage may comprise a side wall that is provided with one or more openings for allowing passage of the pressurising fluid from the supply passage into the vessel. Herewith it is achieved that a single supply passage can bring the pressurizing fluid in one or more
10 advantageous locations underneath the load of solid particulates.

 In an embodiment, the supply passage is a tubular supply passage. A tubular passage allows for a rigid construction that is resistant against the weight of the
15 load of solid particulates. Moreover, thanks to the elongate character of a tubular passage, such a passage can be removable from the vessel via a relatively small port for servicing.

 In an embodiment, the tubular element can extend
20 vertically into the load of solid particulates. Even in such geometry whereby the pressurised fluid is introduced in the load relatively locally via a tubular element the compaction of the load can effectively be reduced.

 Once injected into the vessel, the pressurising fluid
25 follows an essentially vertical trajectory through the solid particulates. For this reason, the tubular supply element preferably extends in a substantially off-vertical direction. Herewith the flow of pressurising fluid through the solid particulates in close vicinity of
30 the tubular element, causing erosion on the tubular element, is avoided.

 Preferably, where the tubular supply passage extends along a longitudinal tube axis, the discharge port is in alignment with the longitudinal tube axis. In this

geometry, the tubular supply passage least obstructs the flow of solid particulates during discharging.

Preferably, the pressurising fluid inlet means is provided with a distributor comprising a porous material, preferably made of a sintered metal, for supporting the solid particulates and allowing passage of the pressurising fluid. Herewith the formation of large bubbles of pressurising fluid is avoided, which could cause excessive turbulence in the load of solid particulates and thereby enhance erosion of the sluice vessel wall and/or sluice vessel internals.

In an advantageous embodiment comprising the mentioned supply passage, the distributor is mechanically supported by the supply passage for withstanding a pressure difference across the distributor corresponding to at least the pressure difference between the low pressure state and a high pressure state. This can be achieved for instance by provision of a relatively small insert of the distributor material, for instance in the form of a disk or a plug, placed in a through opening in the supply passage.

In an embodiment, the sluice vessel has a part with a downwardly converging wall forming at an apex thereof the at least one discharge port. Herewith the discharging of the load of solid particulates is facilitated. The converging wall may be (frustro-)conically shaped, preferably having an included angle of less than 150° , more preferably having an included angle of less than 90° , more preferably less than 39° .

In an advantageous embodiment, the pressurising fluid inlet means are arranged in, on, or close to the converging wall. This has various advantages. A very good distribution of the flow of pressurising fluid through the load of solid particulates can be achieved. Moreover, due to its close vicinity, the pressurising fluid inlet

means can find ample mechanical support by the sluice vessel wall. Herewith mechanical deformation of the pressurising fluid means under the load of the solid particulates can be reduced. Moreover, means for providing mechanical support do not necessarily cause substantial obstruction.

In an advantageous embodiment, the pressurising fluid inlet means are arranged to bring the pressurising fluid into the vessel in a direction facing away from the nearest section of the converging wall. Herewith the flow of pressurising fluid through the solid particulates in close vicinity of the converging wall is avoided, resulting in less erosion on the wall.

In another aspect, the invention relates to a method of operating a sluice vessel for feeding solid particulates into a pressurised pressure vessel of operating a sluice vessel for feeding solid particulates into a pressurised pressure vessel, the sluice vessel comprising at least one discharge port, wherein the sluice vessel is brought from a low pressure state to a high pressure state.

The object of the invention is achieved by the method according to the invention, comprising the steps of:

charging the sluice vessel with a load of the solid particulates when the sluice is in its low pressure state;

bringing the vessel into its high pressure state, before discharging the load via the discharge port, by bringing a pressurising fluid into the vessel thereby increasing the pressure inside the vessel; whereby at least part of the pressurising fluid is brought into the vessel via one or more pressurising fluid inlet means submerged under the load of solid particulates.

By introducing at least part of the pressurising fluid in the sluice vessel through the load of solid particulates, the load of solid particulates is aerated during the pressurisation of the sluice vessel. As a result, adversely compressing the load by the pressurising fluid, and thus the risk of clogging up the discharge port, is reduced.

Advantageously, the same one or more pressurising fluid inlet means may be utilised for aerating the load during subsequent discharging the load via the discharge port, by allowing a flow of aeration fluid through the one or more pressurising fluid inlet means.

Further embodiments of the method and their advantages are derivable from the above described sluice vessel.

The invention will be described hereinafter in more detail and by way of example, with reference to the accompanying drawings in which:

Fig. 1 schematically shows a gasification plant including a sluice vessel in accordance with the invention;

Fig. 2 schematically shows a cross sectional view of a sluice vessel according to one embodiment of the invention;

Fig. 3 schematically shows a detailed view of the indicated area in Fig. 2;

Fig. 4, schematically shows a second embodiment of the invention;

Fig. 5, shows a side view (part a) and a front view (part b) of the inlet means in accordance with the embodiment of Fig. 4;

Fig. 6 schematically shows a cross sectional view of the inlet means in accordance with Fig. 5;

Fig. 7 schematically shows a detailed cross sectional view of a sluice vessel according to third and fourth embodiments of the invention.

In the Figures like reference signs relate to like components.

Although the sluice vessel in accordance with the invention can find application in other fields of technology, the sluice vessel and its operation will be described as part of a gasification plant by way of example.

Referring to Fig. 1 there is schematically shown a coal gasification plant, comprising a sluice vessel 1, a pressurized powder coal storage vessel 11, and a gasification reactor 9 for the generation of synthesis gas. The pressurized powder coal storage vessel, shown here in the form of a feed hopper, is operated at an elevated pressure that may be any pressure between 1 and 70 bar. The feed hopper 11 directs its load into generally cone-shaped receiving means 7. From there, the feed hopper 11 is connected to the gasification reactor 9 via conduits 40. Since the feed hopper 11 is pressurised during normal operation, a continuous feed flow of the powder coal to the gasification reactor 9 is maintainable.

Generation of synthesis gas occurs by partially combusting a carbonaceous fuel, such as coal, at relatively high temperatures in the range of 1000 °C to 3000 °C and at a pressure range of from about 1-70 bar, in the presence of oxygen or oxygen-containing gases in the coal gasification reactor. The fuel and gas mixture is discharged from the feed hopper 11, preferably having multiple outlets 7, each outlet being in communication with at least one burner associated with the reactor. Typically, the pressure inside the feed hopper 11 exceeds the pressure inside the reactor 9, in order to facilitate

injection of the powder coal into the reactor. Typically, a reactor will have burners in diametrically opposing positions, but this is not a requirement of the present invention.

5 The sluice vessel 1 is connected to an inlet port 10 of the feed hopper 11 via conduit 20. The sluice vessel contains an inlet port 2 which may be connected to an atmospheric powder coal storage vessel (not shown). Also provided is an inlet port 5 for introducing and releasing
10 a pressurisation fluid to the sluice vessel. In particular a gaseous pressurisation fluid is suitable. Preferably an inert gas such as nitrogen is used.

15 In operation, the powder coal is charged from the powder coal storage vessel into the sluice vessel 1 via inlet port 2 while the sluice vessel 1 is at atmospheric pressure. The sluice vessel 1 is closed, and pressurised by injecting nitrogen into the sluice vessel 1.

20 After the pressure in the sluice vessel 1 is essentially equal to, or higher than that in the feed hopper 11, the load of powder coal is charged into the feed hopper 11. This way, batches are pressurised and added to a buffer load of the powder coal in the feed hopper 11 to enable a continuous feed flow of powder coal into the reactor at operation pressure.

25 The feed hopper 11 may advantageously be provided with an aeration device in its cone-shaped receiving means 7, for establishing and maintaining a uniform mass flow rate of the coal particulates and gas mixture to the reactor 9. Examples of suitable aeration devices are
30 disclosed in US 4,943,190 and US 4,934,876 and EP-A 0 308 024 which are incorporated by reference. In this form of aeration, a gaseous fluid is introduced in the feed hopper in or close to the cone-shaped receiving means 7, which gaseous fluid is allowed to escape from

the vessel together with the solid particulates. There is thus no intent to influence the pressure in the vessel.

The feed hopper 11 may additionally be provided with means 50 for venting gas from the upper end of the feed hopper 11, for the purpose of maintaining an upward flow of gas from the aeration device through the particulates in the feed hopper 11.

It is believed that, if the pressurisation fluid would only be introduced in the sluice vessel 1 in a space above the load of solid particulates, smaller particulates in the load may be entrained with the flow of pressurisation fluid until the pores between the larger particulates become clogged up and thus a clogged up layer may form. During continued pressurisation, the particulates underneath the clogged up layer would then be compressed as a result of the clogged up layer being pressed down by the overhead pressure, resulting in a heavily compacted load. This may lead to formation of a so-called bridge in the sluice vessel causing obstruction of the discharge port 4.

In accordance with the invention, occurrence of such compaction is avoided from the onset by bringing at least part of the pressurising fluid into the vessel via one or more pressurising fluid inlet means submerged under the load of solid particulates.

Fig. 2 schematically shows in longitudinal cross section a sluice vessel in accordance with an embodiment of the invention. The sluice vessel comprises a pressure shell 3, having a part 31 with a downwardly converging wall, here shown as a conical part of the wall. At the apex thereof a discharge port 4 is provided, to be connected to, for instance, conduit 20 in Fig. 1. The included angle of the conical part is 30°.

Pressurising means, generally indicated by reference number 6 in Fig. 2, is provided on the centre line of the

sluice vessel. The elongate device is prevented to move away from the centre line by support means, here shown in the form of two sets of three supports 8 in the form of centring struts in the conical part 31 of the sluice vessel.

The top part 12 of the pressurising means can be formed of a conventional supply pipe, suitably having a diameter of 6 inch. The function of this supply pipe is to carry the nitrogen to a bottom part 13 of the pressurising means, which supports the actual nitrogen inlet means into the load of powder coal.

Referring now to Fig. 3, the connection of the top part 12 to the bottom part 13 is shown in more detail. The top part 12 is in this embodiment connected to the bottom part 13 via cooperating flanges (16,17). The bottom part 13 in this embodiment is provided with a supply passage in the form of an inner pipe 14, and a distributor in the form of a concentrically arranged porous outer pipe 15.

The inner pipe 14 provides the strength of the assembly, and for this reason it is preferably made of a strong material such as solid steel. It also functions as the supply passage for transporting the nitrogen through the distributor. For a proper functioning of the distributor, the inner pipe 14 is preferably provided with a plurality of openings for letting the nitrogen in the sluice vessel. The openings preferably have a diameter smaller than $\frac{2}{3}$ of the outer diameter of the inner pipe 14, but larger than 1 % of the outer diameter of the inner pipe. A suitable value is approximately 6 mm in a pipe having an outer diameter of 3 inch.

The outer pipe 15 is made of a porous material, for supporting the solid particulates and allowing passage of the nitrogen into the load of powder coal. Suitably, the outer pipe is made of a sintered metal. The outer pipe 15

assures a large nitrogen distribution surface area submerged in the load of powder coal. For maximising the distribution surface area, an annular gap can be left between the inner pipe 14 and the outer pipe 15, which is particularly useful in the case where the openings in the inner pipe cover only a relatively small fraction of the available surface on the inner pipe. An alternative arrangement will, however, be discussed below.

In operation, nitrogen can be supplied through the nozzle 27 at the top of the sluice vessel as shown in Figs. 2 and 3, after the vessel is almost completely filled with a load of powder coal. In this embodiment, the pressurization device for pressurising the nitrogen can be mechanically supported by the top nozzle.

Referring now to Figs. 4 to 6 there is shown a second embodiment of the invention. As can be seen in Fig. 4, the sluice vessel comprises a pressure shell 3, having a part 41 with a downwardly converging wall, here shown as a conical part of the wall. As in the previous embodiments, a discharge port 4 is provided in the apex of the downwardly converging wall, to be connected to, for instance, conduit 20 in Fig. 1.

The pressurising fluid inlet means is provided in the form of a number of supply passages 22, here embodied as pipes, installed on the inside wall of the conical part 41 of the sluice vessel. Each pipe 22 has a number of openings 23 provided with disks or plugs of a porous material, such as a sintered metal as in the above described embodiment. The pipes form a supply passage for transporting the pressurised fluid, preferably in the form of nitrogen. The pipes 22 are connectable to a pressurisation device via ports 25 provided in the downwardly converging part 41 of the vessel side wall, here shown in the form of a flanged design.

The disks of the porous material form the distributor to distribute the nitrogen flow, while the pipes provide the mechanical robustness of the inlet means. Since the pipes 22 are arranged close to the converging wall, they can be very well supported such that deformation by the dynamic forces of the coal inventory is minimised or even prevented, without providing extensive support struts. Therefore, only the pipes 22 themselves form an obstruction to the flow of coal particulates during discharging of the sluice vessel.

In order to further minimise obstruction, the discharge port 4 is in alignment with the longitudinal axis along which the pipes extend.

Moreover, by providing the inlet means in close vicinity to the downward converging part of the side wall, the rising nitrogen bubbles will be as much as possible evenly distributed over the entire contents of the powder coal inventory.

Another advantage of providing the pipes in close vicinity with the downward converging part 41 of the side wall, is that this allows for advantageously mounting of the pipes extending in an off-vertical direction. Nitrogen that is passed through the distributors into the load of coal particulates flows essentially vertically upward through the coal. The upward flow of nitrogen through the coal particulates has a liquefying effect on the particulates, which is also abrasive due to the presence of the particulates. By off-vertical mounting, the wear caused by the pressurising fluid travelling through the coal inventory on the tube itself is minimised.

For the same reason, the openings in each pipe 22, preferably numbering between 100 and 180 per pipe, and in the present example 140 in number, each face away from

the side wall 41 that the respective pipe 22 is mounted on.

The pipes are replaceable during a maintenance shut down, and easy to repair. Maintenance on the porous metal disks or plugs can be delegated to the manufacturer. Alternatively, the pipes can be refurbished by replacing fouled or damaged disks or plugs.

Fig. 5 shows a detailed side view (Fig. 5a) and front view (Fig. 5b) of the pipes 22. Each opening in the pipe is provided with a disk 24 of the porous material. In this way, the mechanically relatively weaker disks 24 are mechanically supported by the mechanically stronger pipe arrangement.

Fig. 6 shows a cross sectional view of a pipe 22 in the direction along the axis. The opening 23 provided in the pipe has a diameter of approximately 65 mm, and is provided with an insert 28 for mounting the disk 24 of the porous material. The disk 24 has a diameter of 55 mm, and is held in place by means of a fillet weld 26 such that a diameter of 50 mm remains available. The thickness of the disk is 10 mm.

A similar construction of the supply passage, whereby instead of the outer pipe 15, the distributor is provided in the form of disks or plugs in openings in the inner pipe 14 can be adopted in the embodiment of Fig. 1.

Fig. 7 shows a detailed cross sectional view of an alternative embodiment. As in the previous embodiments, the sluice vessel comprises a pressure shell 3, having a part 51 with a downwardly converging wall, here shown as a conical part of the wall. At the apex thereof a discharge port 4 is provided to be connected to, for instance, conduit 20 in Fig. 1.

In this embodiment, the pressurising fluid inlet means is provided in the form of a liner 18 arranged inside the conical part 51 of the wall leaving a space 19

between the outside shell wall and the liner 18 as supply passage. The outside wall is provided with one or more connecting nozzles 37 for supply of the pressurised nitrogen into the space 19.

5 The liner 18 may essentially be formed of the porous material, such as the sinter metal material as used for the outer pipe in Fig. 3, and thus essentially acting as the distributor. This is shown in Fig. 7 on the right
10 hand side of the cross section. Much in the same way as in the embodiment of Fig. 3, this assures a large nitrogen distribution surface area submerged in the load of powder coal.

15 Alternatively, and this is schematically shown on the left hand side of Fig. 7, the liner 18 may be formed of a strong material such as solid steel provided with openings and a distributor in the form of disks or plugs of the porous material similar to what is shown in the second embodiment. In the latter case, the strong
20 material provides the mechanical strength to the arrangement, whereby the distributor is supported by the strong material.

25 In the above described embodiments, suitable porous material is sinter material, preferably sinter metal, more preferably sinter stainless steel, such as 316 L stainless steel elements, pre-fabricated by GKN Sinter Metals GmbH, Dahlienstrasse 43, D-42477 Radevormwald, Germany. Other sinter materials may also be used, such as sinter glass.

30 It is better to have a large number of small pores than a small number of large pores.

35 The diameter of the pores should be large enough to let the gas pass, but not too large, so that coal particles are prevented to enter the tubing. Suitable diameters are between 1 and 50 μm , preferably 1 to 20 μm , more preferably 7 to 14 μm . The pores are more preferably

selected to allow a pressure build-up to a pressure that is higher, preferably at least 5 bar higher, than the pressure in the feed hopper 11 in a time period of 10 minutes or less, more preferably 5 minutes or less. Suitable pressures in the sluice vessel in its high pressure state are for instance 10 to 80 bar, or 25 to 80 bar or 35 to 80 bar.

Although the invention set out above has been described primarily with reference to pulverized coal, the method and apparatus according to the invention are also suitable for reactive solids and other finely divided solid fuels which could be partially combusted, such as lignite, anthracite, bituminous, brown coal, soot, petroleum coke, and the like. Advantageously, the size of solid carbonaceous fuel is such that 90% by weight of the fuel has a particle size smaller than 100 mesh (A.S.T.M.).

Additionally, the present invention can be used for any one of granular, pulverized, and powdered solids such as resins, catalysts, fly ash, bag house and electrostatic precipitator fines.

C L A I M S

1. Sluice vessel for feeding solid particulates into a pressurized pressure vessel, the sluice vessel having a low pressure state and a high pressure state, the sluice vessel comprising means for charging the sluice vessel with a load of the solid particulates when the sluice vessel is in its low pressure state, at least one discharge port, and pressurising means for increasing the pressure inside the vessel by bringing a pressurising fluid into the vessel, to bring the vessel into its high pressure state before discharging the load via the discharge port, whereby the pressurising means comprises one or more pressurising fluid inlet means arranged to be submerged under the load of solid particulates.

2. Sluice vessel according to claim 1, wherein the pressurising fluid inlet means comprises a supply passage for transporting the pressurising fluid, the supply passage being connectable to a pressurisation device.

3. Sluice vessel according to claim 2, wherein the supply passage comprises a side wall that is provided with one or more openings for allowing passage of the pressurising fluid from the supply passage into the vessel.

4. Sluice vessel according to claim 2 or 3, wherein the supply passage is a tubular supply passage.

5. Sluice vessel according to claim 4, wherein the tubular supply element extends in a substantially off-vertical direction.

6. Sluice vessel according to claim 4 or 5, wherein the tubular supply passage extends along a longitudinal tube axis, and the discharge port is in alignment with the longitudinal tube axis.

7. Sluice vessel according to any one of the previous claims, wherein the pressurising fluid inlet means is provided with a distributor comprising a porous material, preferably made of a sintered metal, for supporting the solid particulates and allowing passage of the pressurising fluid.

8. Sluice vessel according to claim 7 when dependent on claim 2, wherein the distributor is mechanically supported by the supply passage for withstanding a pressure difference across the distributor corresponding to at least the pressure difference between the low pressure state and a high pressure state.

9. Sluice vessel according to any one of the previous claims, having a part with a downwardly converging wall forming at an apex thereof the at least one discharge port.

10. Sluice vessel according to claim 9, wherein the pressurising fluid inlet means are arranged in, on, or close to the converging wall.

11. Sluice vessel according to claim 9 or 10, wherein the pressurising fluid inlet means are arranged to bring the pressurising fluid into the vessel in a direction facing away from the nearest section of the converging wall.

12. Sluice vessel according to any one of the previous claims, wherein the pressure difference in the vessel in its low pressure state and its high pressure state is at least 10 bar.

13. Method of operating a sluice vessel for feeding solid particulates into a pressurised pressure vessel, the sluice vessel comprising at least one discharge port, wherein the sluice vessel is brought from a low pressure state to a high pressure state, comprising the steps of:

charging the sluice vessel with a load of the solid particulates when the sluice is in its low pressure state;

bringing the vessel into its high pressure state,
before discharging the load via the discharge port, by
bringing a pressurising fluid into the vessel thereby
increasing the pressure inside the vessel;
5 whereby at least part of the pressurising fluid is
brought into the vessel via one or more pressurising
fluid inlet means submerged under the load of solid
particulates.

10 14. Method according to claim 13, further comprising the
step of discharging the load via the discharge port,
while aerating the load by allowing a flow of aeration
fluid through the one or more pressurising fluid inlet
means.

A B S T R A C T

SLUICE VESSEL AND METHOD OF operating SUCH A SLUICE
VESSEL

Sluice vessel for feeding solid particulates into a pressurized pressure vessel, the sluice vessel having a low pressure state and a high pressure state, the sluice vessel comprising means for charging the sluice vessel with a load of the solid particulates when the sluice vessel is in its low pressure state, at least one discharge port, and pressurising means for increasing the pressure inside the vessel by bringing a pressurising fluid into the vessel, to bring the vessel into its high pressure state before discharging the load via the discharge port, whereby the pressurising means comprises one or more pressurising fluid inlet means arranged to be submerged under the load of solid particulates.

TS 1311 EPL

EPO - DG 1

25.03.2003

91.

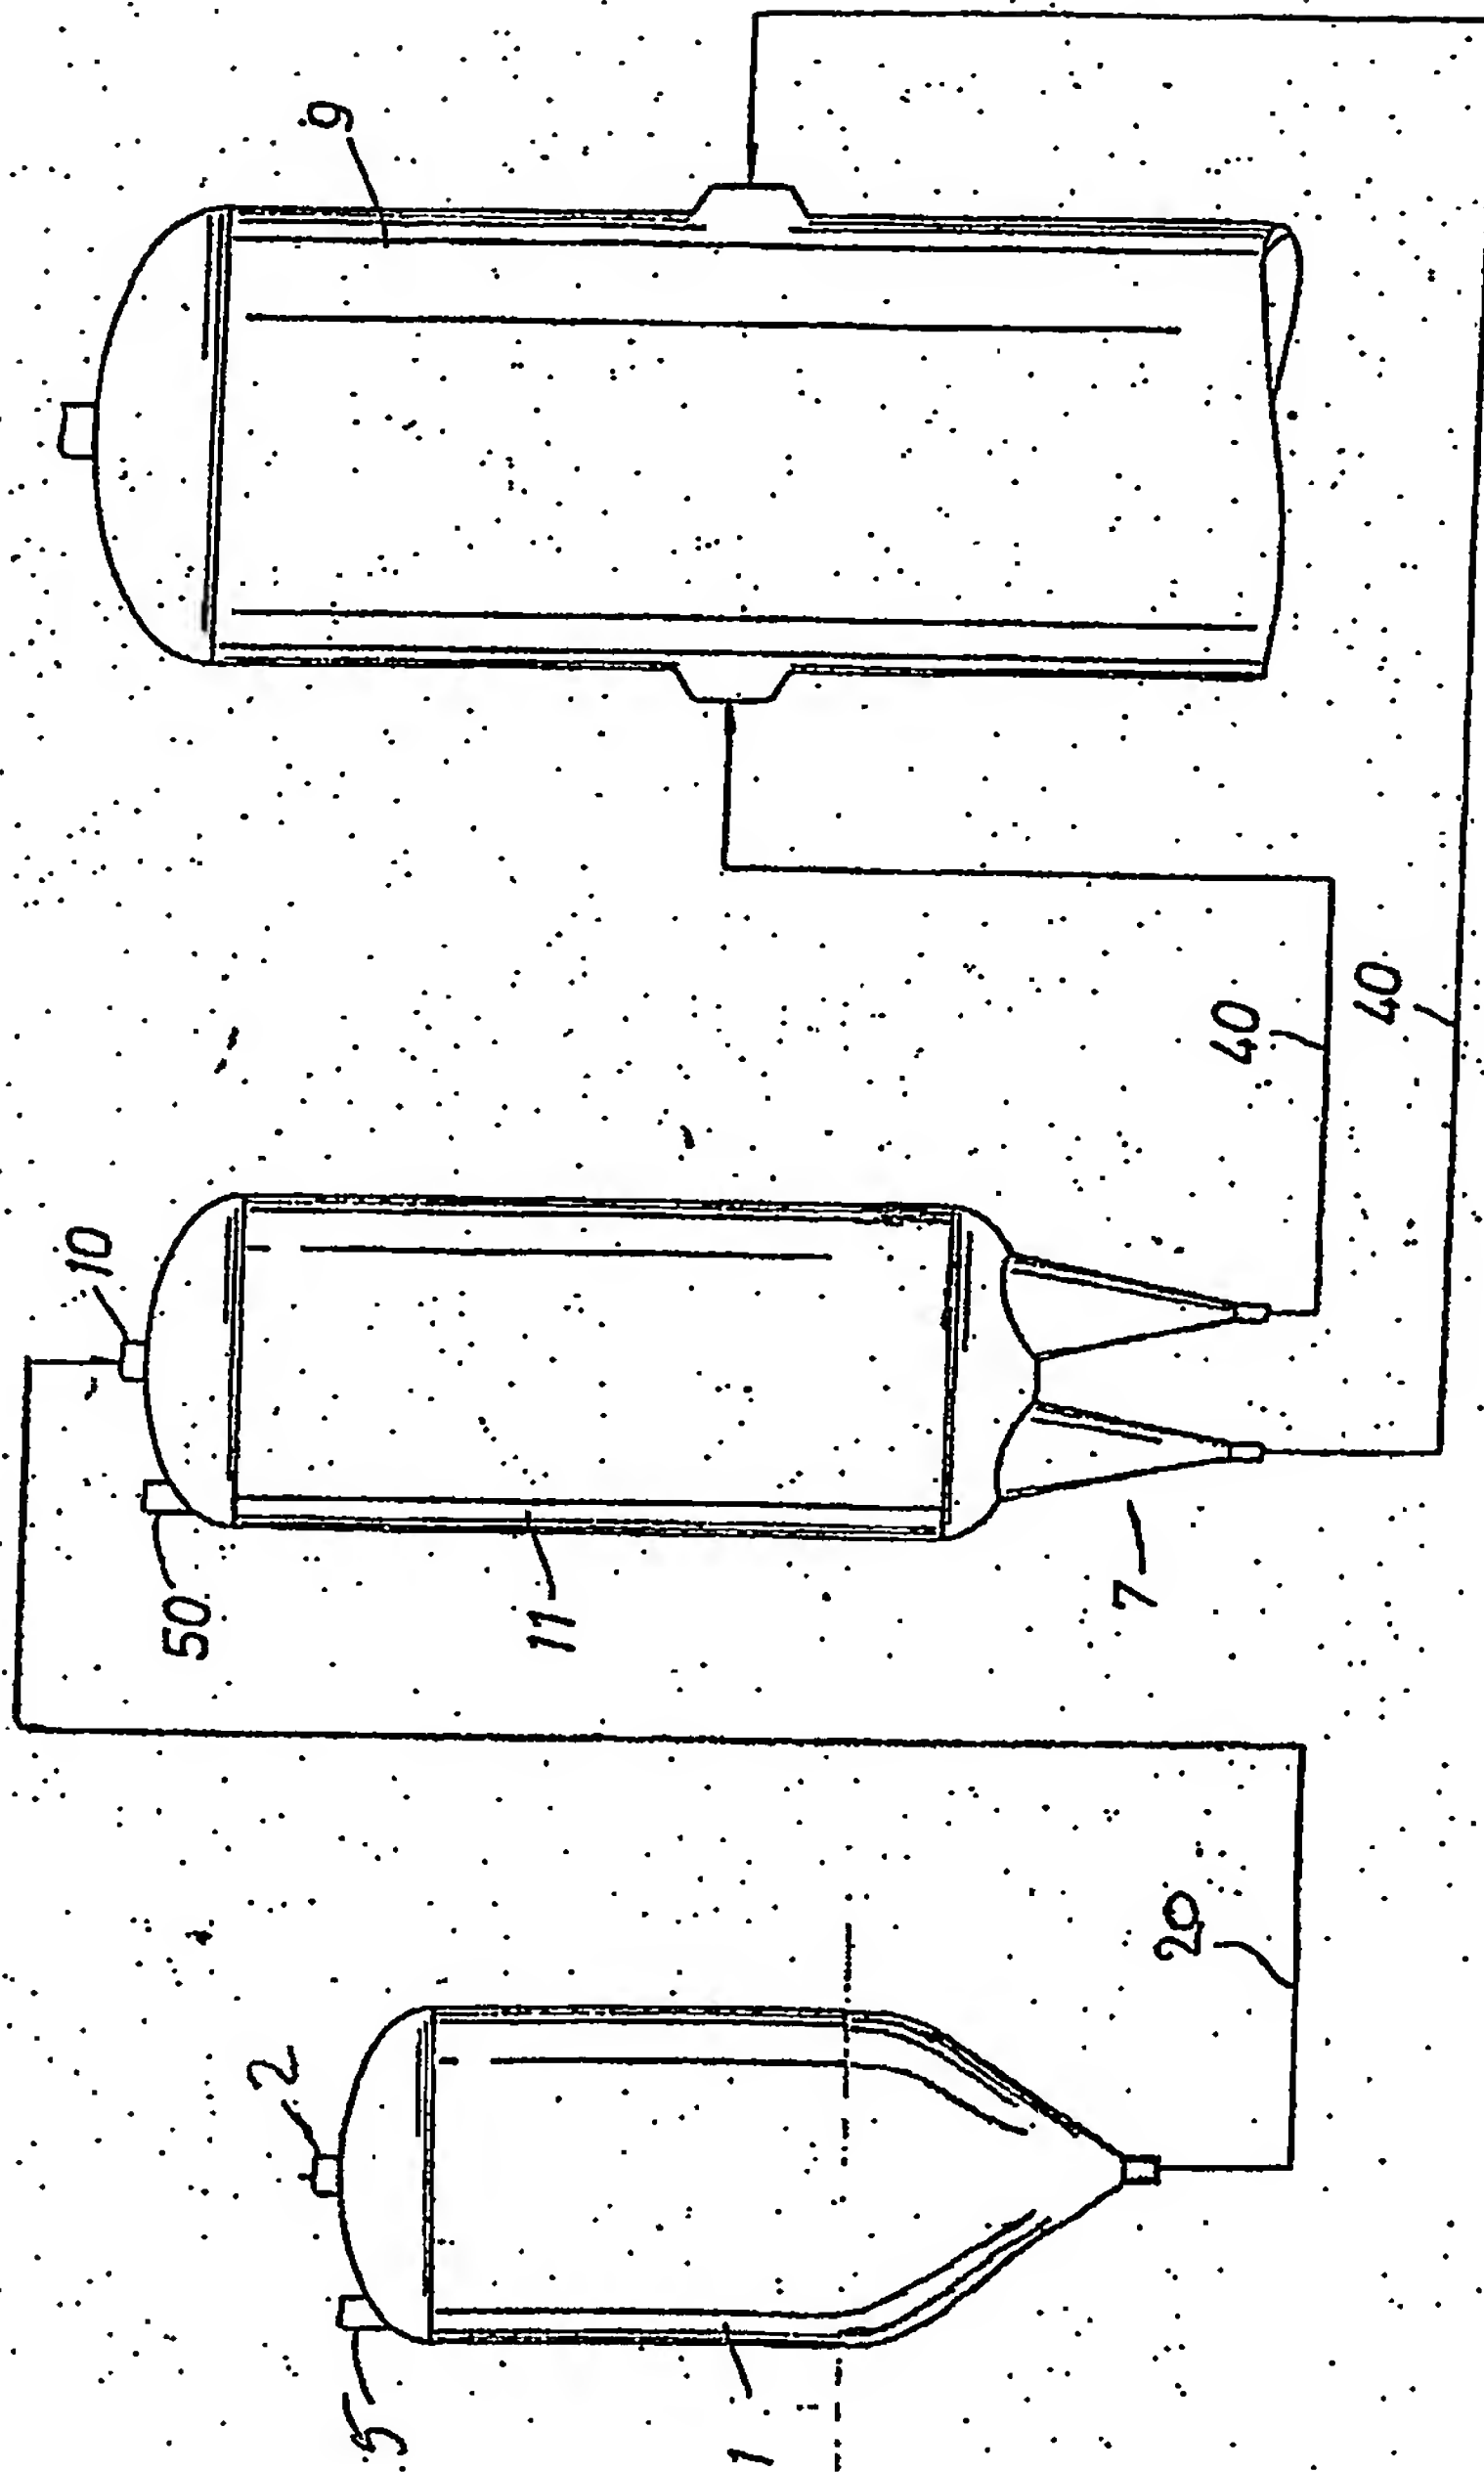


FIG. 1

TS 1311 EPC

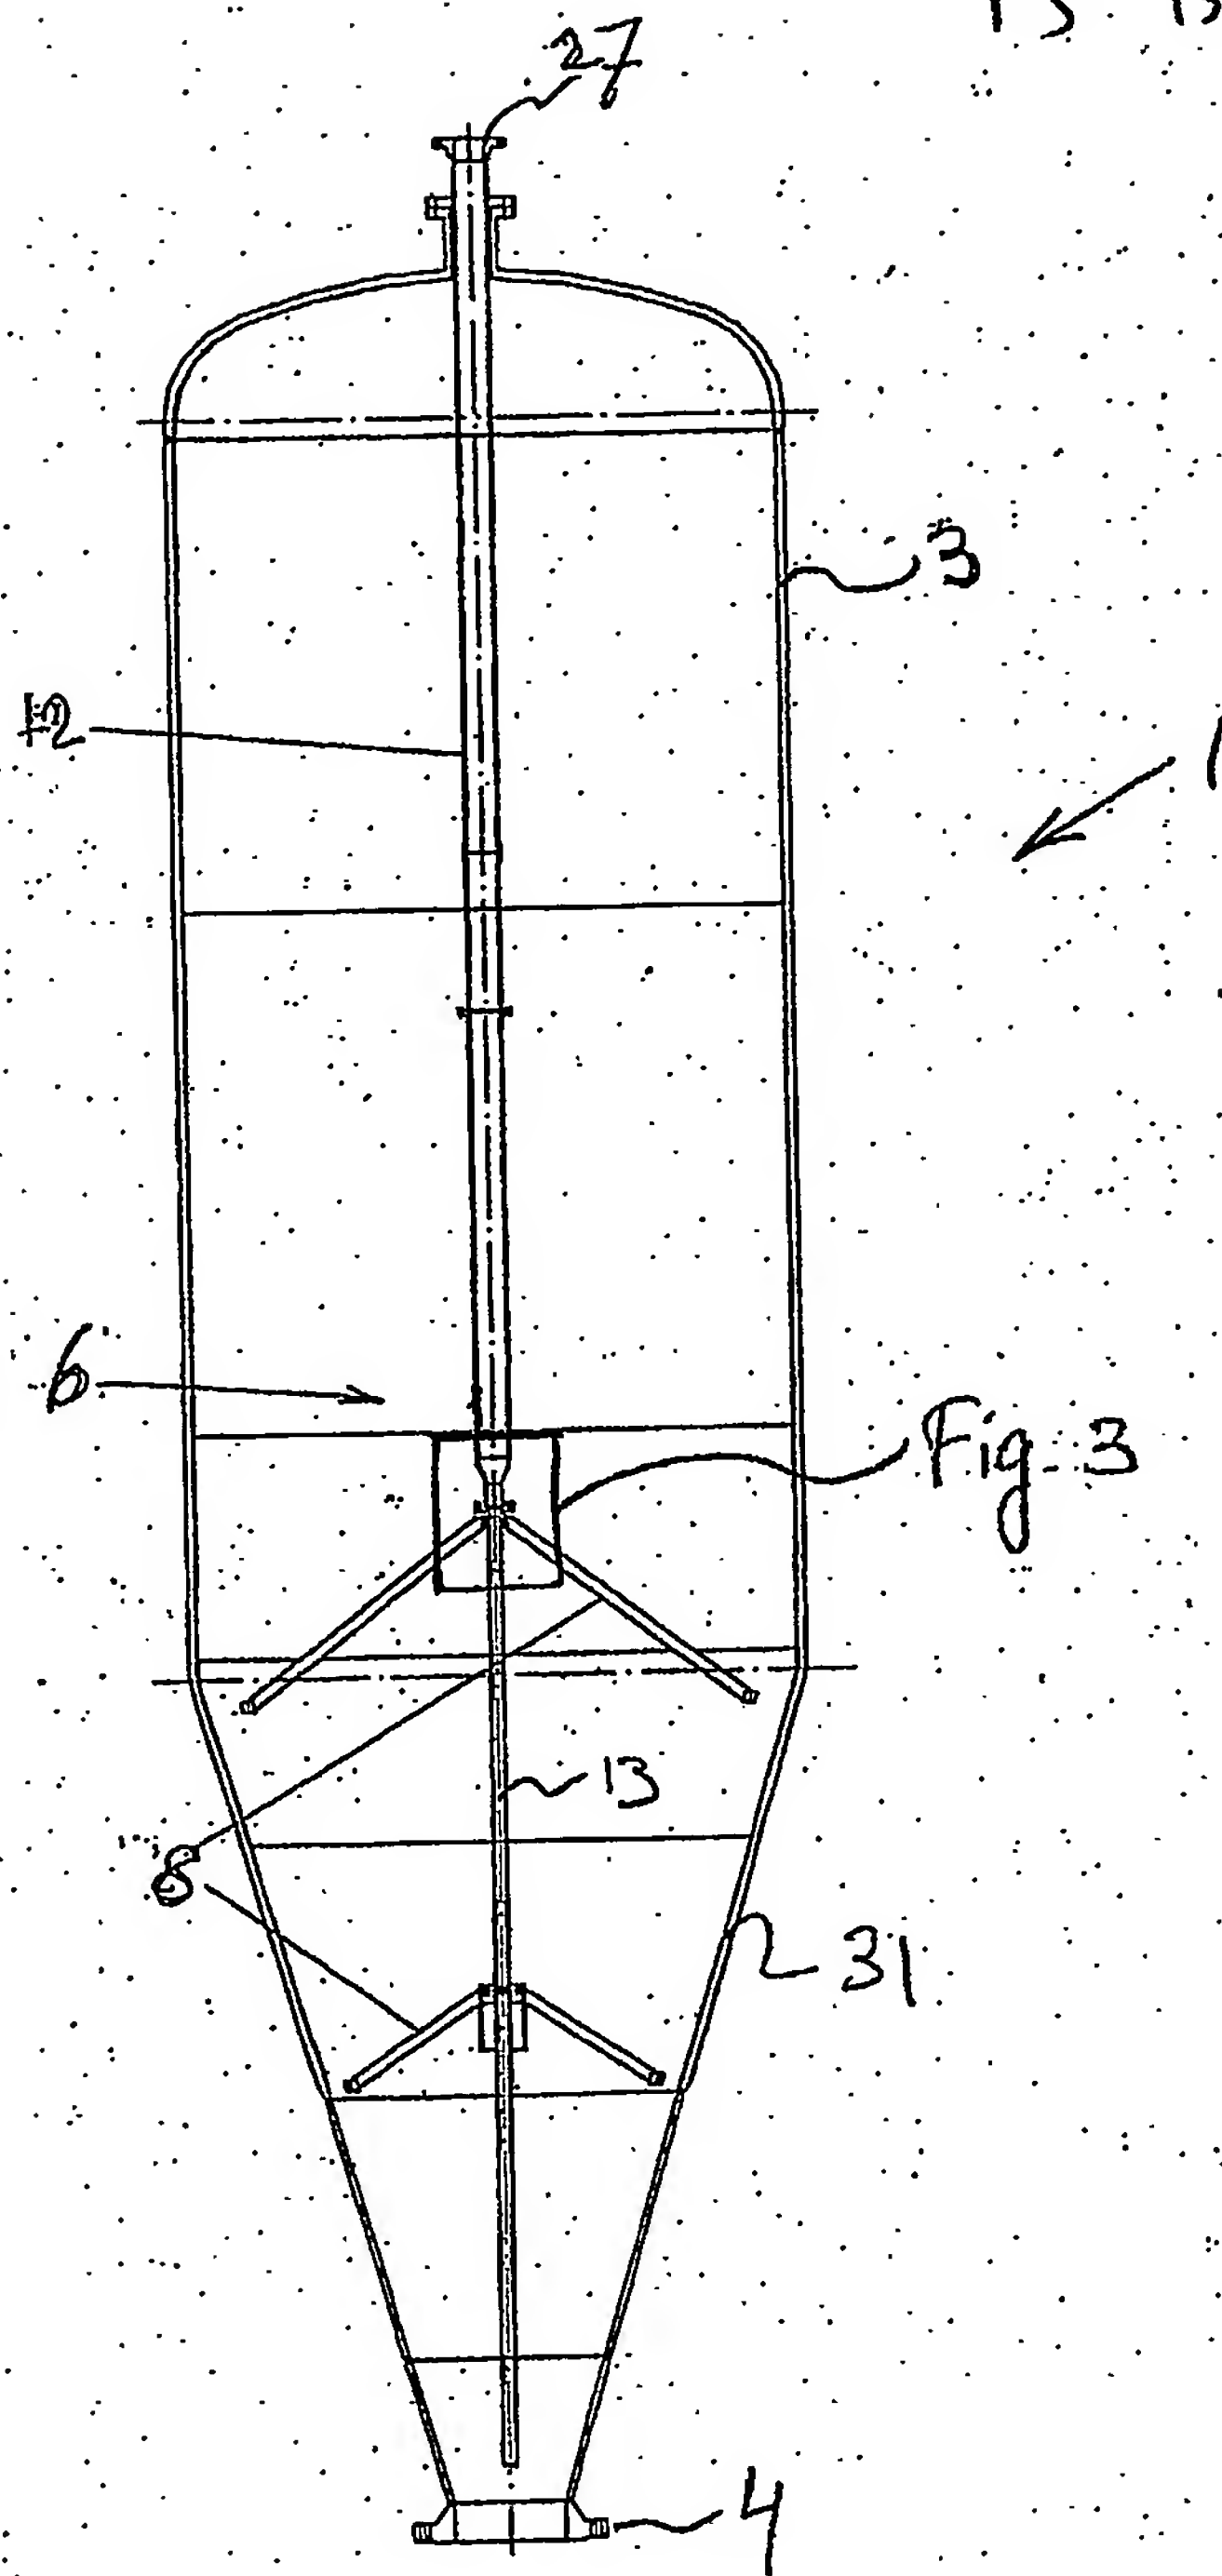


FIG. 2

TS 1311 EPL

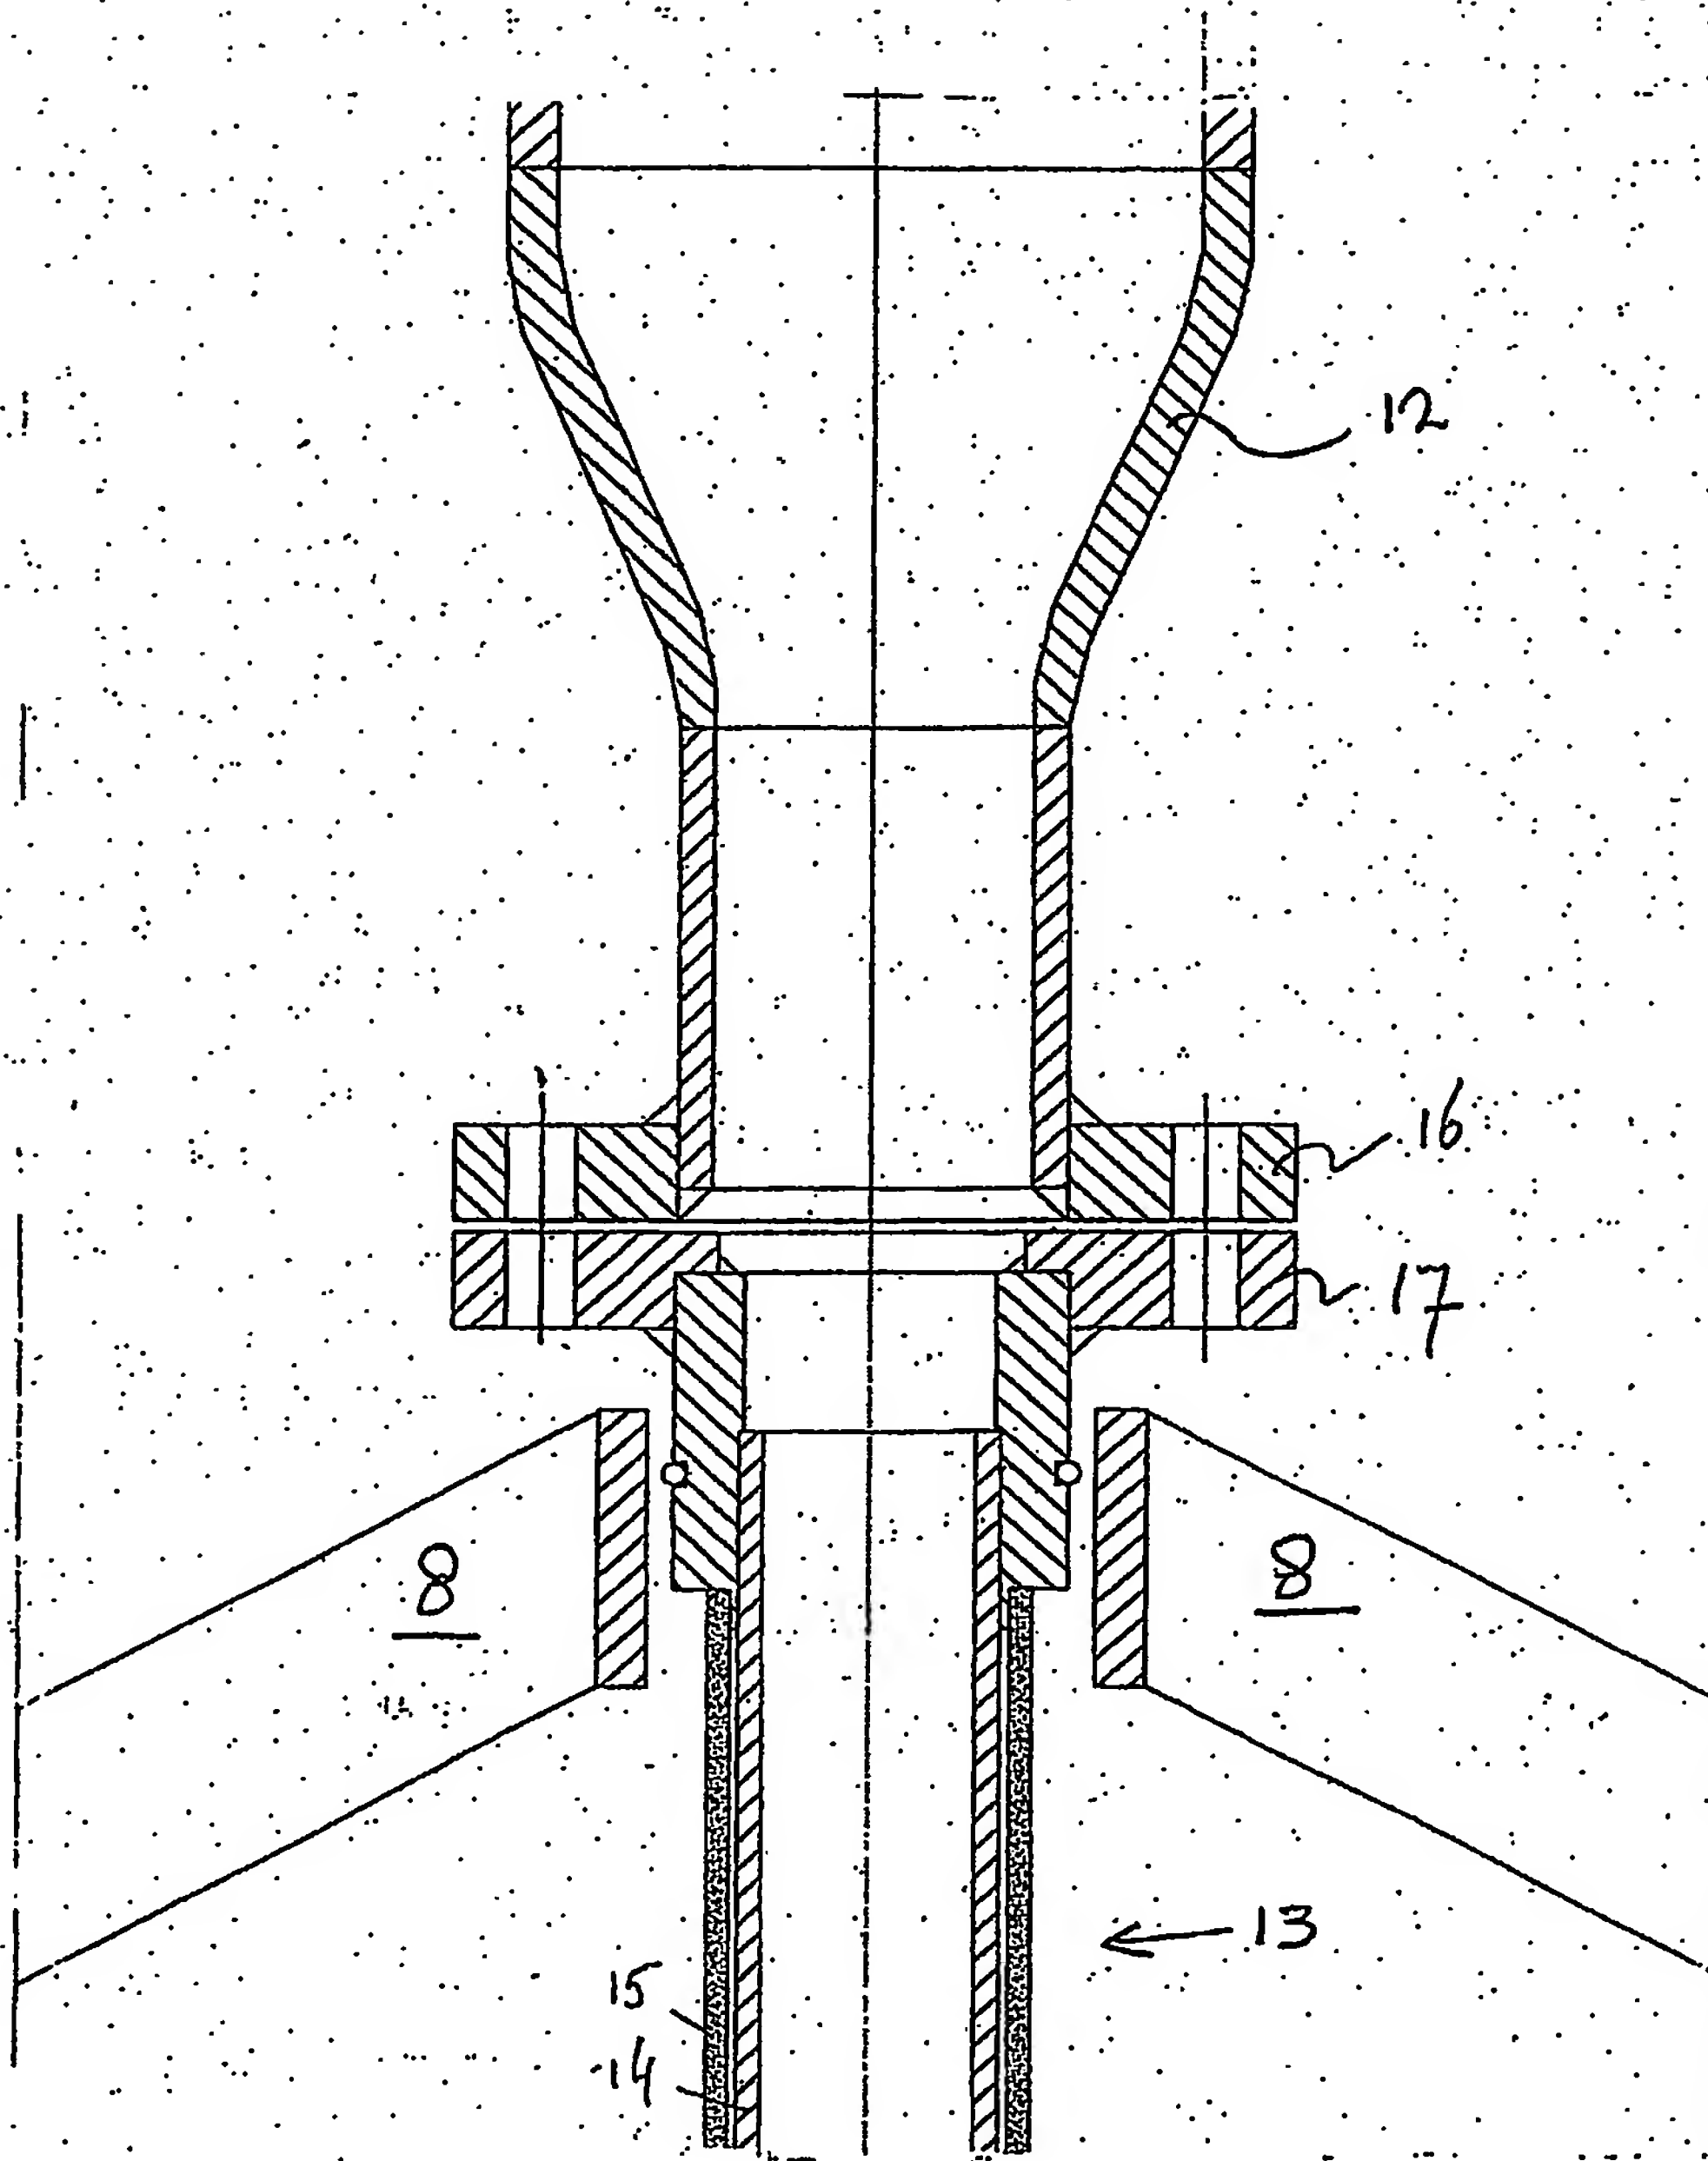


FIG. 3

15 1311 CPC

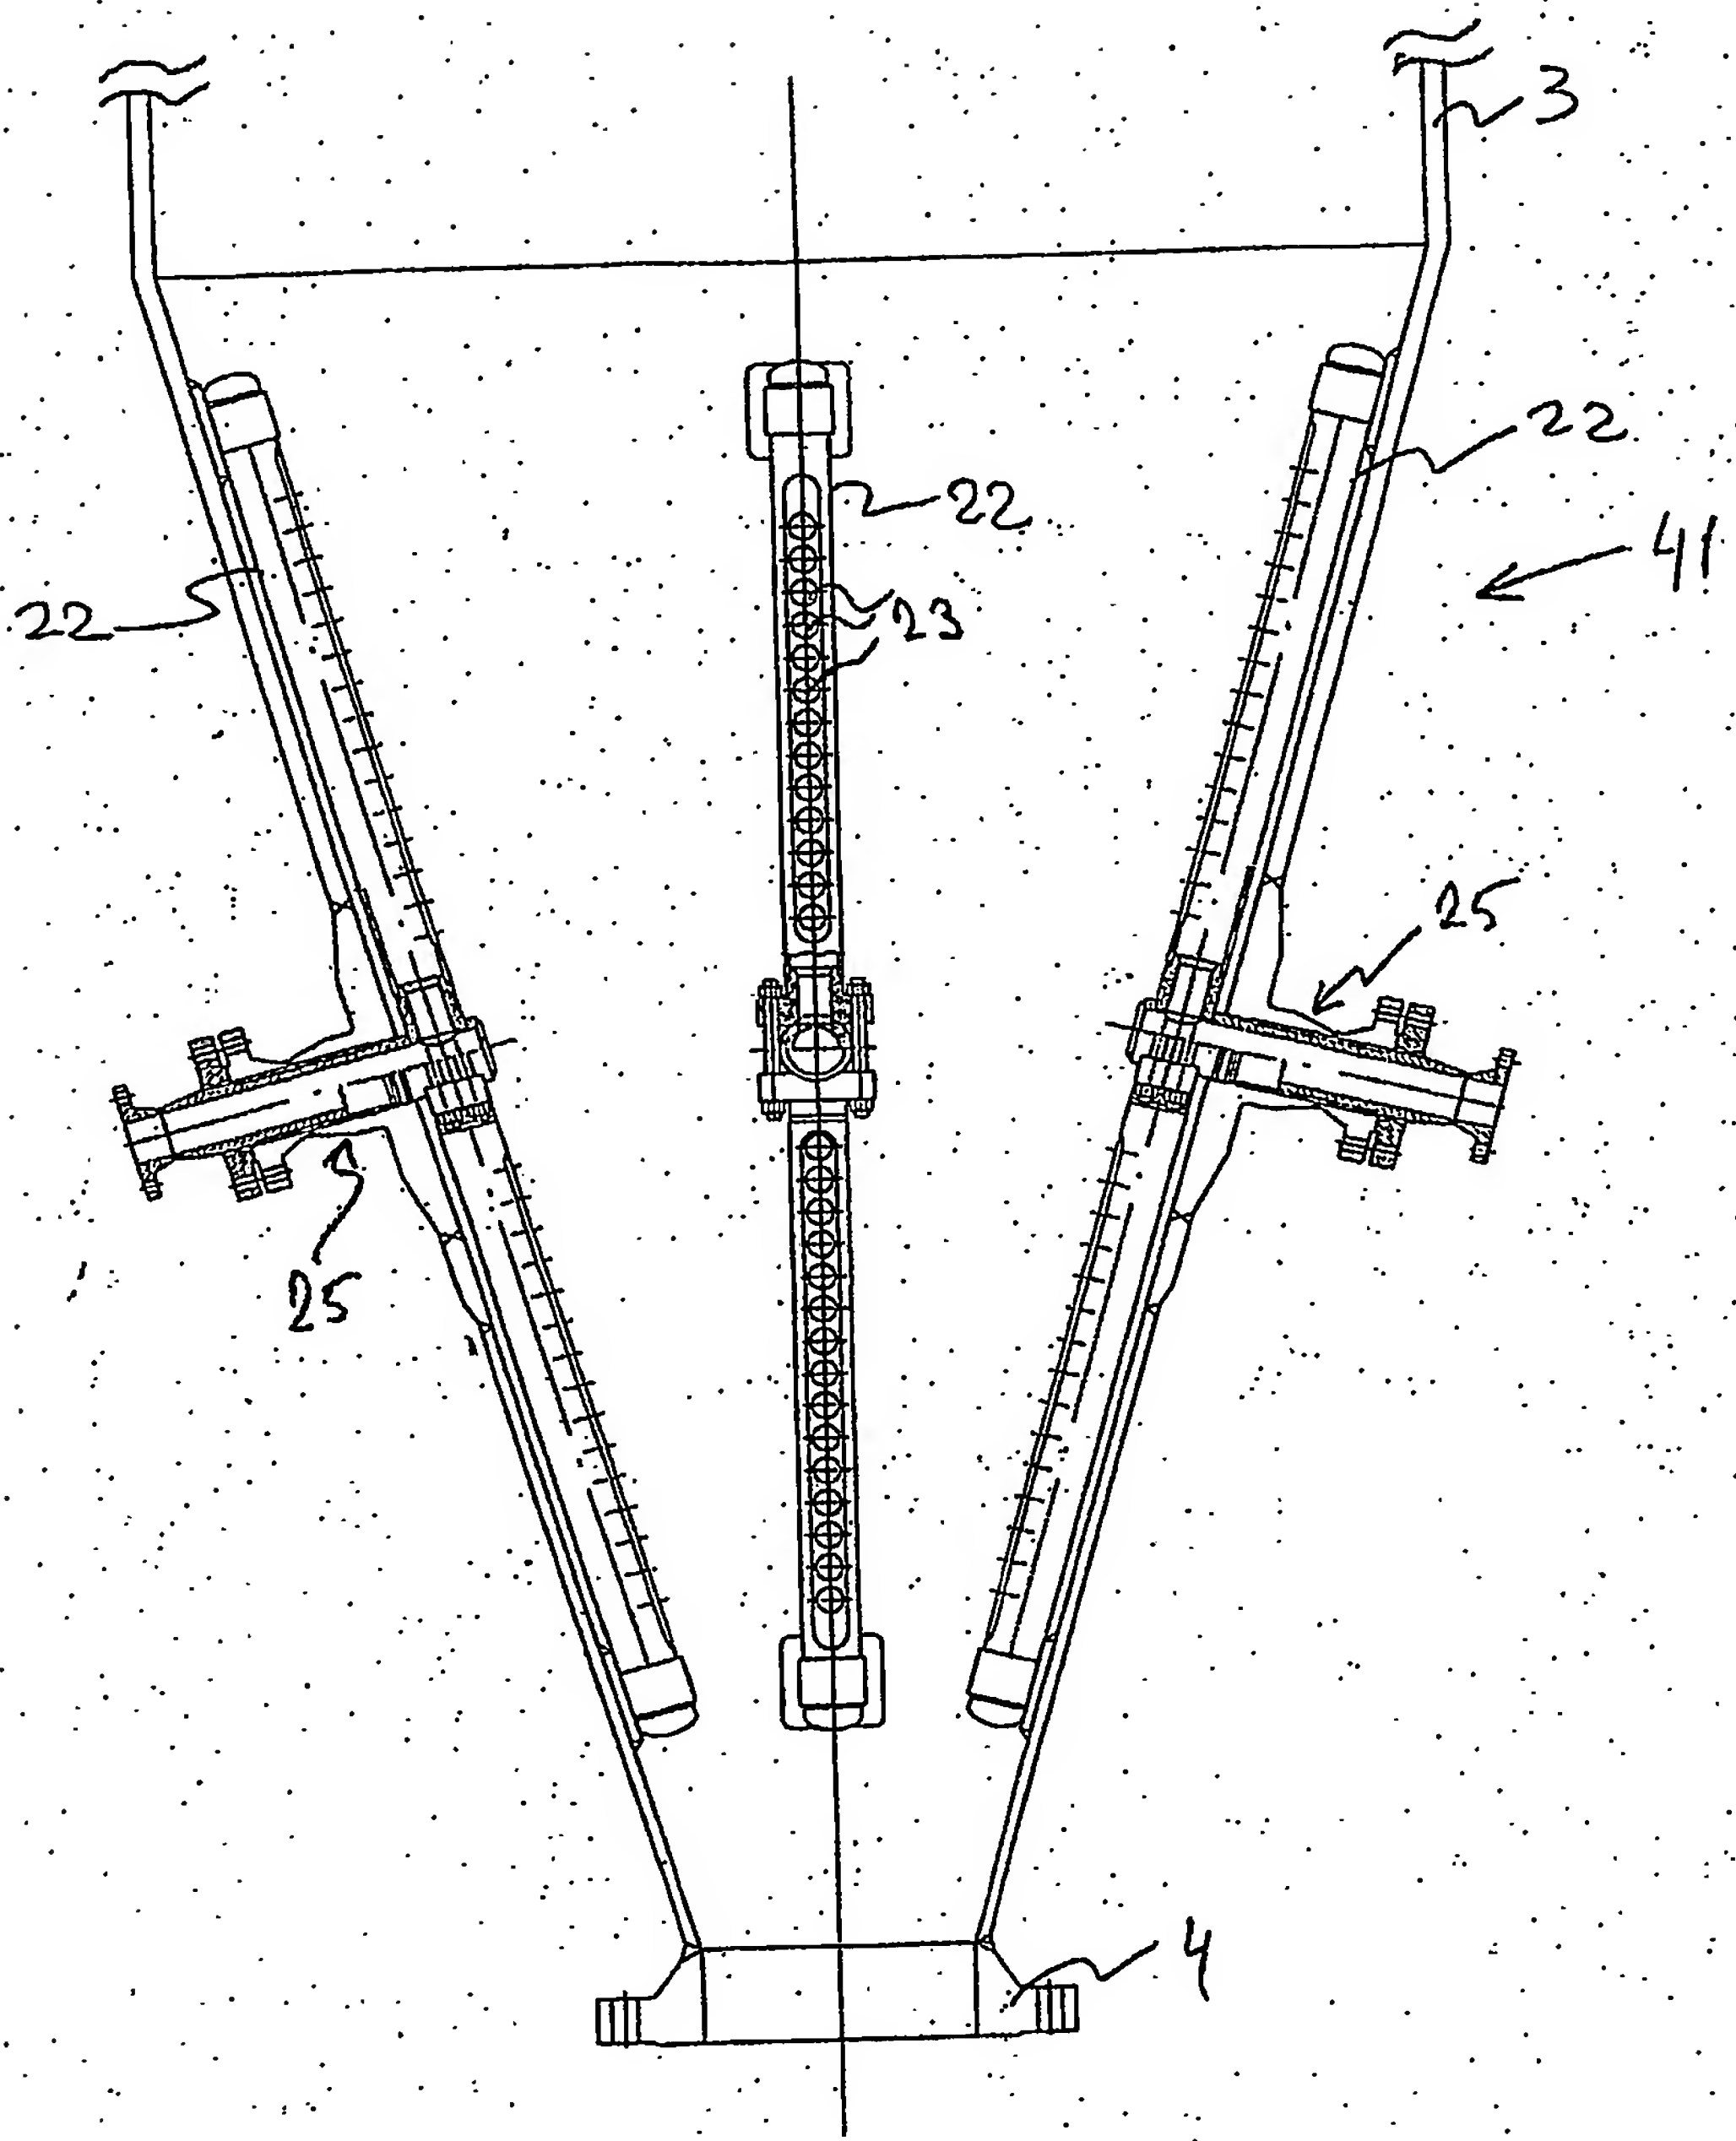


FIG. 4

TS 1311 EPL

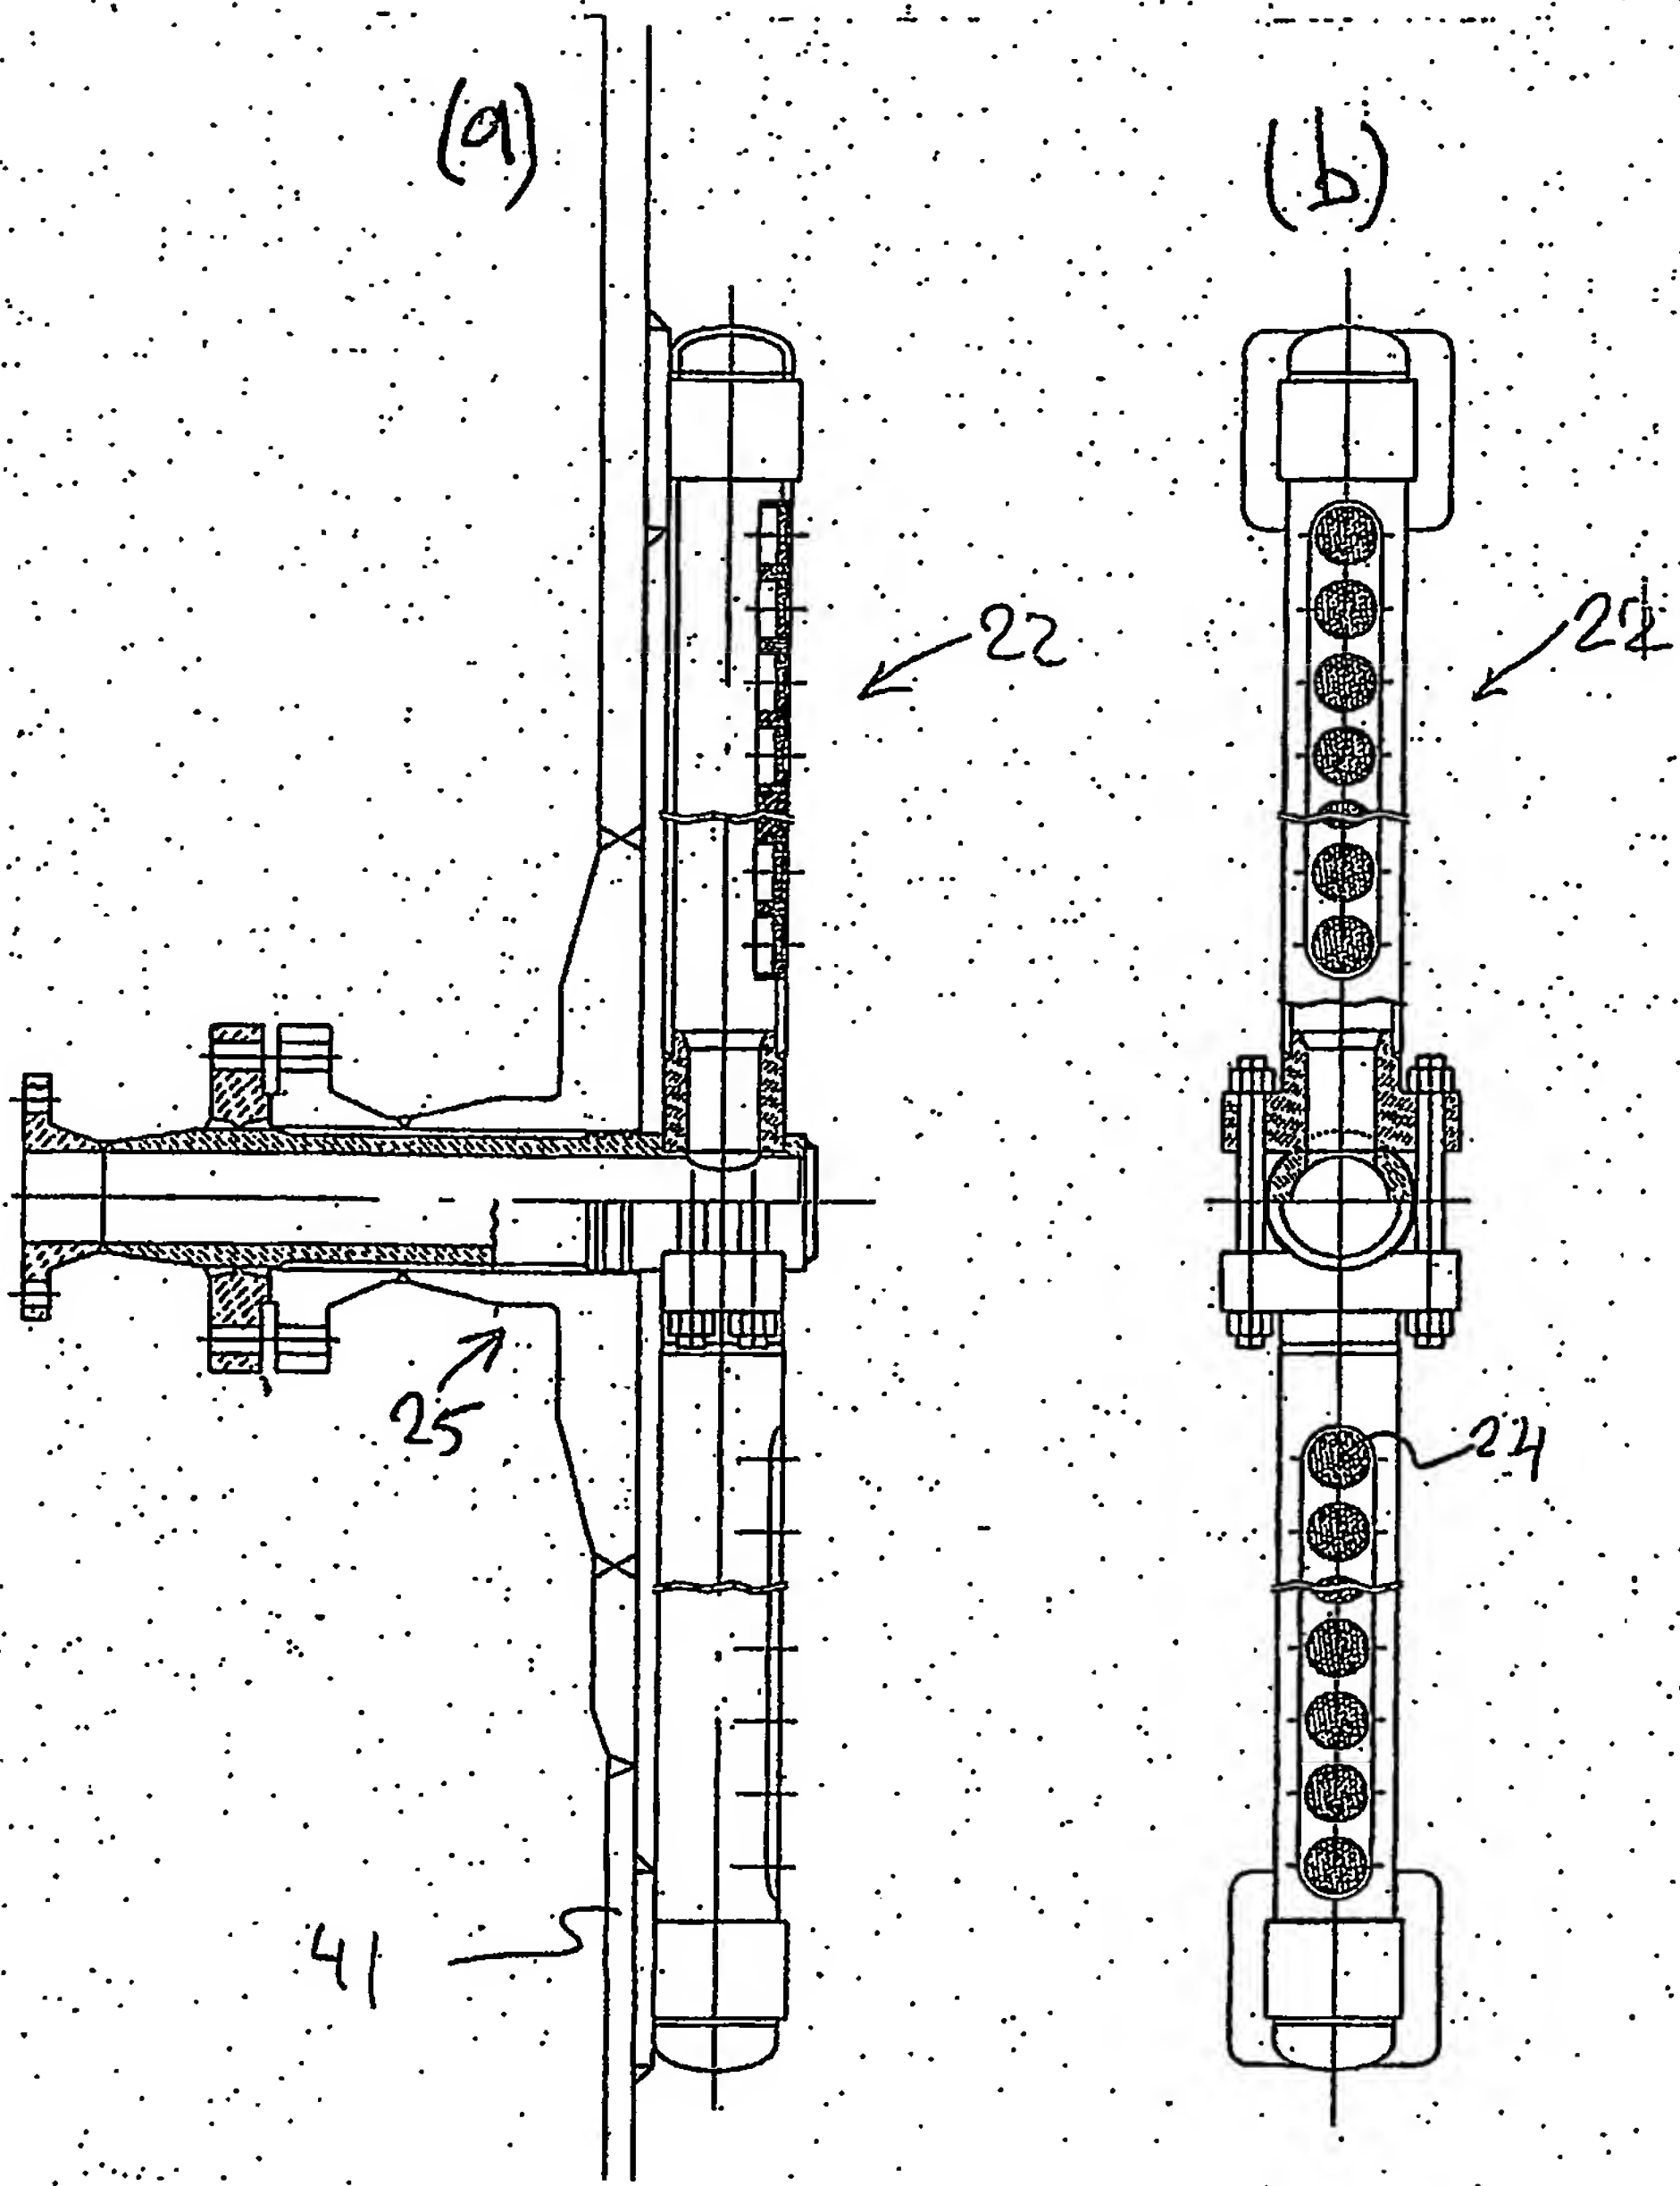


FIG. 5

15 1311 EPC

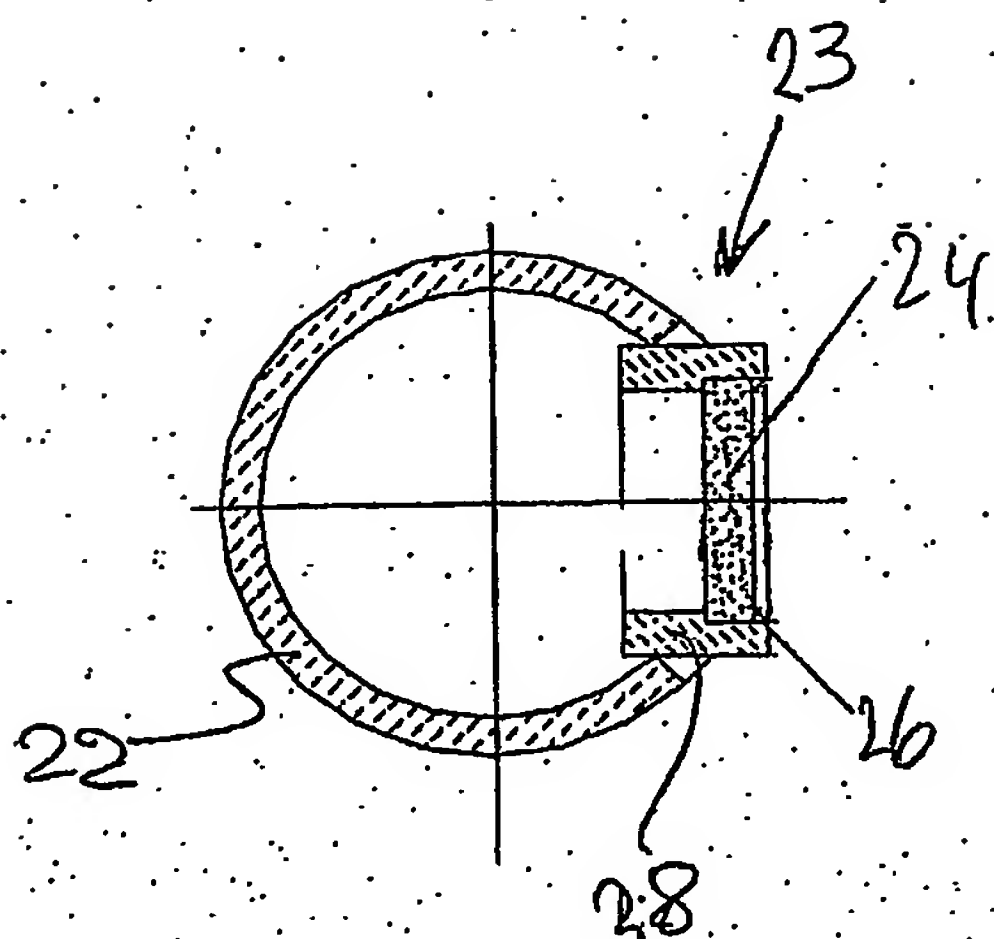


FIG. 6

TS 1311 EPC

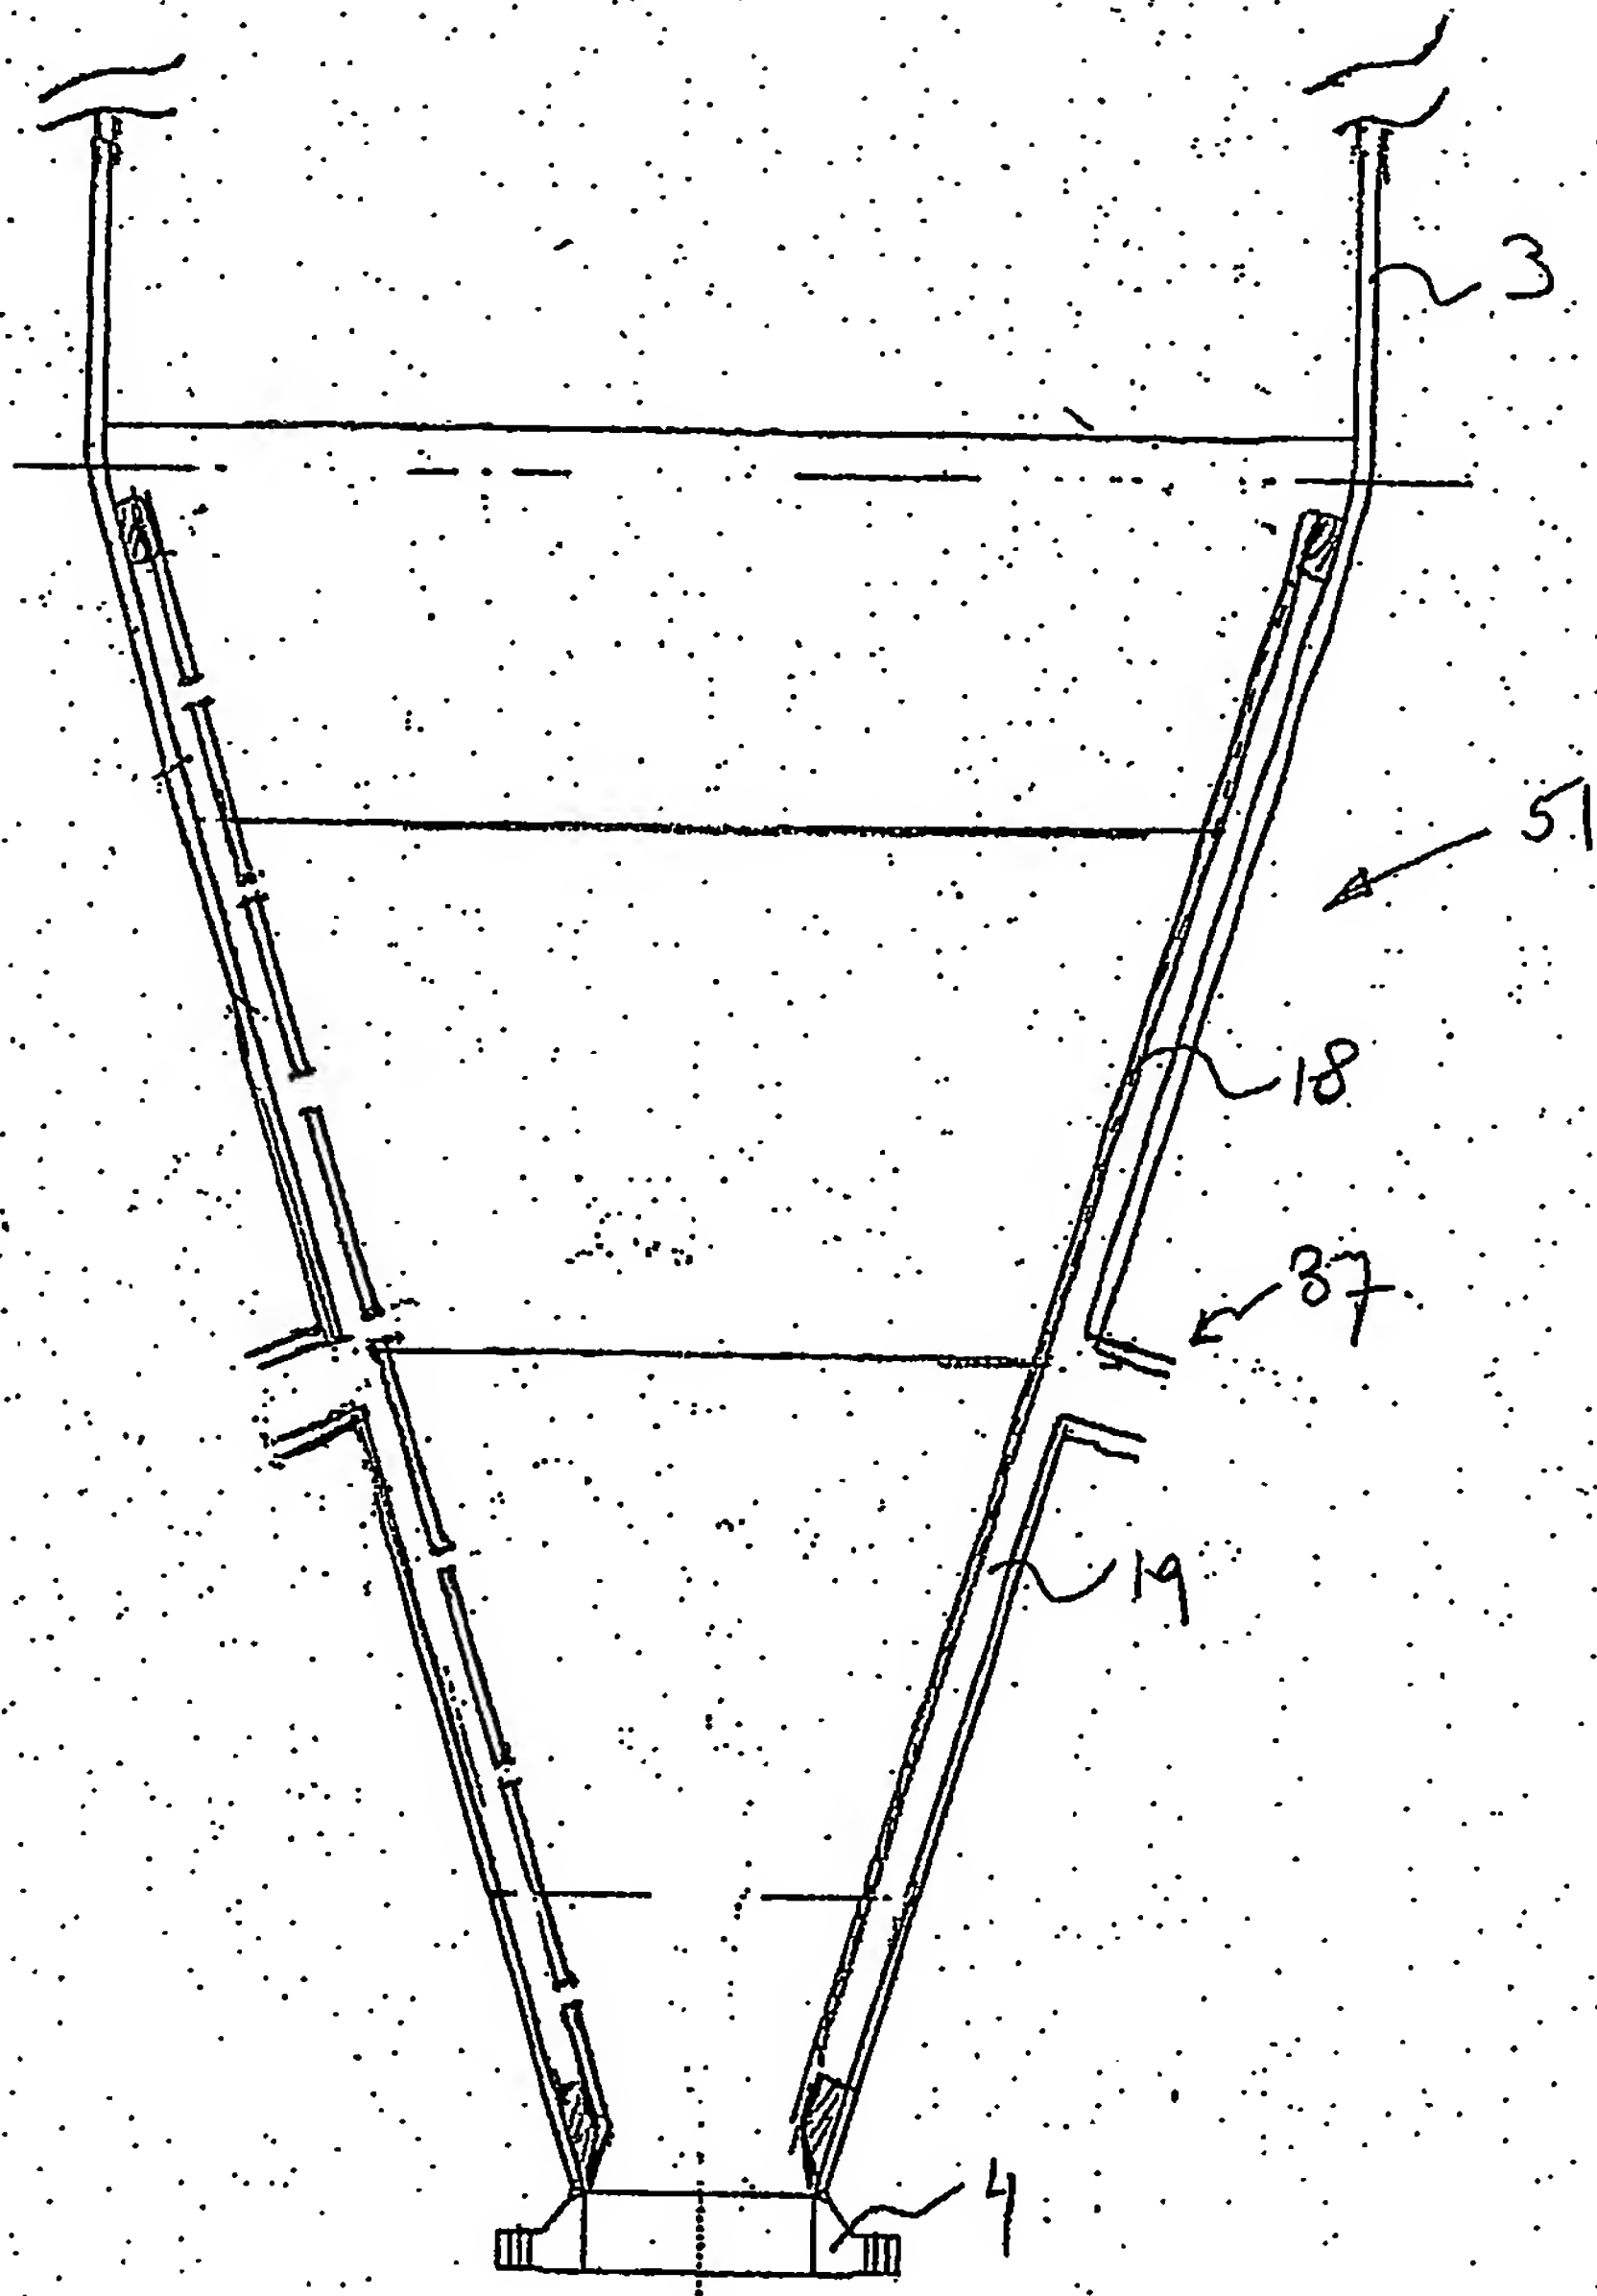


FIG. 7

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.